










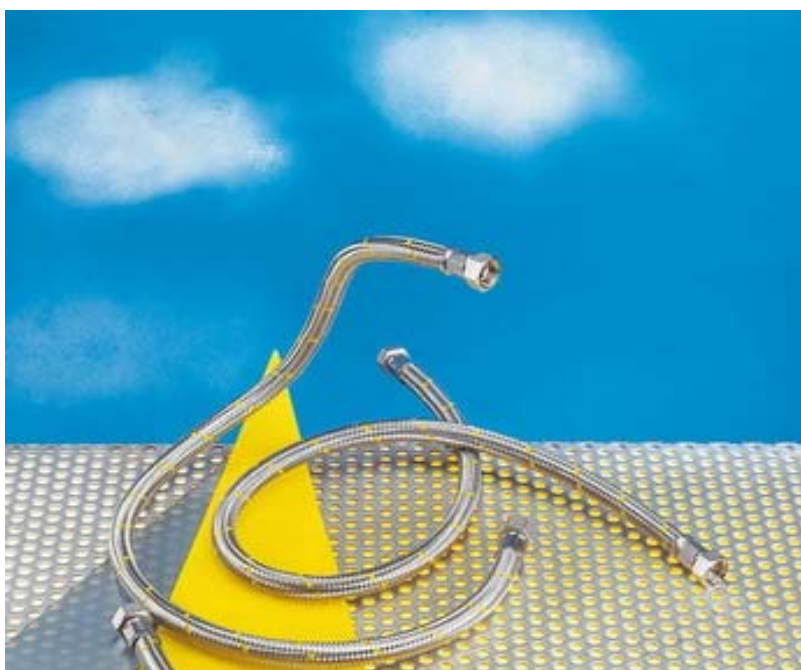




ROOSTEVABA TERASPUNUTISEGA TERMOPLASTILISED  
NITRIILIST GAASIVOOLIKUD SICURGAS T



 mm	 Ø mm			 R = mm	 bar	 °C	 mm	 °C
13	19	CW 614N	INOX	45	10	0 + 50	10	-5 + 30

	PIKKUS	KOOD	HIND	HIND+20%
<b>F1/2"-F1/2"</b> 	400 mm	63004	4,77	<b>5,72</b>
	600 mm	63006	5,58	<b>6,70</b>
	800 mm	63008	6,73	<b>8,07</b>
	1000 mm	63010	7,39	<b>8,87</b>
	1250 mm	63012	8,76	<b>10,51</b>
	1500 mm	63015	9,86	<b>11,83</b>
	2000 mm	63020	12,52	<b>15,02</b>
<b>F1/2"-M1/2"</b> 	400 mm	63104	5,28	<b>6,34</b>
	600 mm	63106	6,05	<b>7,26</b>
	800 mm	63108	7,19	<b>8,63</b>
	1000 mm	63110	8,00	<b>9,60</b>
	1250 mm	63112	9,15	<b>10,98</b>
	1500 mm	63115	10,33	<b>12,40</b>
<b>CF1/2"-F1/2"</b> 	400 mm *	63204	3,75	4,50
	800 mm *	63208	6,67	8,00
	1000 mm *	63210	7,50	9,00
	1250 mm	63212	10,40	<b>12,48</b>
	1500 mm *	63215	9,17	11,00
	2000 mm *	63220	9,17	11,00
<b>CF1/2"-M1/2"</b> 	400 mm *	63304	4,17	<b>5,00</b>
	600 mm	63306	7,75	<b>9,30</b>
	800 mm *	63308	6,25	7,50
	1000 mm *	63310	7,50	9,00
	1250 mm	63312	10,95	<b>13,14</b>
	1500 mm *	63315	9,17	11,00
2000 mm *	63320	9,58	11,50	

\* lõpumüük

